

Permit with introductory note

The Environmental Permitting (England & Wales) Regulations 2010

CoGen Limited

Hooton Park Sustainable Energy Facility
Biossence Hooton Park
North Road
Hooton Park
Eastham, Merseyside
CH65 1AJ

Permit number

EPR/YP3039EX

Hooton Park Sustainable Energy Facility

Permit number EPR/YP3039EX

Introductory note

This introductory note does not form a part of the permit

This permit controls the operation of a waste incineration plant. The relevant listed activity is Section 5.1 Part A(1)(b) – incineration of non-hazardous waste in a waste incineration plant with a capacity exceeding 3 tonnes per hour. The permit implements the requirement of the EU Directives on Industrial Emissions and Waste.

The main features of the permit are as follows:

The installation is designed to recover energy from Solid Recovered Fuel (SRF) by incineration. The SRF utilised will be compliant with the CEN 15359: 2011 standard. Energy will be recovered from the installation in the form of electricity, which will be exported to the National Grid.

The Hooton Park Sustainable Energy Facility is located at Ordnance Survey Grid Reference SJ 373 799, some 1.5 km to the south-east of the centre of Eastham. The site is in an industrial area on the eastern coast of the Wirral, between Eastham to the west and Ellesmere Port to the south east. The site is surrounded by oil storage tanks to the north and south and is adjacent to an oil refinery to the west. To the east of the site is the Manchester Ship Canal. The wider industrial area around the proposed site includes a car manufacturing plant amongst other uses. A significant proportion of the wider industrial area is vacant.

The nearest settlements to the proposed development are at Eastham to the north, Hooton to the south-west, and Ellesmere Port to the south. The nearest residential properties are those on the eastern fringe of Eastham, approximately 1 km to the north-west of the site, and along Rivacre Road a minimum of 750 metres to the south-west. Properties on the northern edge of Ellesmere Port / Childer Thornton lie approximately 2km to the south.

There are two Habitats sites (Special Areas of Conservation, Special Protection Areas or Ramsar sites) within 10km of the installation, the Mersey Estuary and the Dee Estuary.

There is one Site of Special Scientific Interest within 2km of the installation, the Mersey Estuary

There are three non-statutory local wildlife and conservation sites and within 2km of the installation.

The Installation will utilise circulating fluidised bed gasification technology with the capacity to burn approximately 266,000 tonnes per annum (34.1 tonnes per hour) of SRF, capable of generating up to 42 MWe using waste gasification technology.

The facility is Combined Heat and Power (CHP) ready. If a district heating market becomes available, the provision of a heat off-take to supply a network would be possible without any modifications to the installed system.

The Installation includes the incoming fuel and screening, fuel storage, fuel feeding equipment, a gasifier, an ash removal system, a gasification air system, a starter burner and a product gas line including a cooler and filters, facilities for the treatment of exhaust gases, on-site facilities for

treatment or storage of residues, devices and systems for controlling combustion operations, recording and monitoring conditions.

SRF is delivered to the Installation site via bulk loading trailers and screened and unloaded into the fuel storage silos and transferred by conveyor into the gasification day storage silos. The SRF is gasified in a circulating fluidised bed to produce a product gas which is cooled in a gas cooler. Particulates are removed from the product gas by ceramic candles and transferred off-site as a waste.

The cooled and filtered product gas is transferred to the burners in the boiler for combustion. The boiler produces super-heated steam which is then passed to a steam turbine to generate electricity for export to the National Grid.

The flue gas treatment system comprises selective catalytic reduction (SCR) for the reduction of oxides of nitrogen emissions, a bag house filter for the removal of particulates, the injection of lime to control acid gases and the injection of carbon, primarily to control dioxin emissions. The cleaned exhaust gases are released to atmosphere via an 80m stack.

Continuous monitoring of oxygen, carbon monoxide, hydrogen chloride, sulphur dioxide, nitrogen oxides, ammonia, hydrogen fluoride, volatile organic compounds and particulates is undertaken for the flue gases in the stack. Solid residues generated by the plant will be sampled on a regular basis to assess bottom ash burnout and to monitor the levels of specified pollutants.

The permit sets conditions controlling the management, operation and the control of emissions from the installation, including the monitoring and reporting of emissions to all environmental media.

The status log of the permit sets out the permitting history, including any changes to the permit reference number

Status Log of the permit		
Detail	Date	Comments
Application EPR/YP3039EX/A001	Duly made 11/08/14	
Additional Information Received	15/09/14	Revised air dispersion modelling files for a single stream plant.
Additional Information Received	14/01/14	Further information regarding plant operational conditions and natural gas usage.
Additional Information Received	19/01/15	Supporting information addressing compliance with Articles 47, 50(2), 50(3) and 50(4) of IED.
Schedule 5 notice	Issued 27/03/15 Re-issued 11/06/15	Responses dated 09/07/15 and 02//09/15.
Additional Information Received	27/11/15	Request to amend monitoring requirement for Hydrogen Fluoride.
Permit determined	1412/15	

End of Introductory Note

Permit

The Environmental Permitting (England and Wales) Regulations 2010

Permit number
EPR/YP3039EX

The Environment Agency hereby authorises, under regulation 13 of the Environmental Permitting (England and Wales) Regulations 2010

CoGen Limited ("the operator"),
whose registered office is

Blyth House
Blyth Park
Cresswell
Stoke on Trent
ST11 9RD

company registration number **9161643**

to operate an installation at

Hooton Park Sustainable Energy Facility
Biossence Hooton Park
North Road
Hooton Park
Eastham, Merseyside
CH65 1AJ

to the extent authorised by and subject to the conditions of this permit.

Name	Date
Tom Swift	14/12/15

Authorised on behalf of the Environment Agency

Conditions

1 Management

1.1 General management

- 1.1.1 The operator shall manage and operate the activities:
- (a) in accordance with a written management system that identifies and minimises risks of pollution, including those arising from operations, maintenance, accidents, incidents, non-conformances, closure and those drawn to the attention of the operator as a result of complaints; and
 - (b) using sufficient competent persons and resources.
- 1.1.2 Records demonstrating compliance with condition 1.1.1 shall be maintained.
- 1.1.3 Any person having duties that are or may be affected by the matters set out in this permit shall have convenient access to a copy of it kept at or near the place where those duties are carried out.

1.2 Energy efficiency

- 1.2.1 The operator shall:
- (a) take appropriate measures to ensure that energy is recovered with a high level of energy efficiency and energy is used efficiently in the activities.
 - (b) review and record at least every four years whether there are suitable opportunities to improve the energy efficiency of the activities; and
 - (c) take any further appropriate measures identified by a review.
- 1.2.2 The operator shall provide and maintain steam and/or hot water pass-outs such that opportunities for the further use of waste heat may be capitalised upon should they become practicable.
- 1.2.3 The operator shall review the practicability of Combined Heat and Power (CHP) implementation at least every 2 years. The results shall be reported to the Agency within 2 months of each review.

1.3 Efficient use of raw materials

- 1.3.1 The operator shall:
- (a) take appropriate measures to ensure that raw materials and water are used efficiently in the activities;
 - (b) maintain records of raw materials and water used in the activities;
 - (c) review and record at least every four years whether there are suitable alternative materials that could reduce environmental impact or opportunities to improve the efficiency of raw material and water use; and
 - (d) take any further appropriate measures identified by a review.

1.4 Avoidance, recovery and disposal of wastes produced by the activities

- 1.4.1 The operator shall take appropriate measures to ensure that:
- (a) the waste hierarchy referred to in Article 4 of the Waste Framework Directive is applied to the generation of waste by the activities; and

- (b) any waste generated by the activities is treated in accordance with the waste hierarchy referred to in Article 4 of the Waste Framework Directive; and
- (c) where disposal is necessary, this is undertaken in a manner which minimises its impact on the environment.

1.4.2 The operator shall review and record at least every four years whether changes to those measures should be made and take any further appropriate measures identified by a review.

2 Operations

2.1 Permitted activities

- 2.1.1 The operator is only authorised to carry out the activities specified in schedule 1 table S1.1 (the “activities”).
- 2.1.2 Waste authorised by this permit in condition 2.3.3 shall be clearly distinguished from any other waste on the site.

2.2 The site

- 2.2.1 The activities shall not extend beyond the site, being the land shown edged in green on the site plan at schedule 7 to this permit.

2.3 Operating techniques

- 2.3.1
 - (a) The activities shall, subject to the conditions of this permit, be operated using the techniques and in the manner described in the documentation specified in schedule 1, table S1.2, unless otherwise agreed in writing by the Environment Agency.
 - (b) If notified by the Environment Agency that the activities are giving rise to pollution, the operator shall submit to the Environment Agency for approval within the period specified, a revision of any plan specified in schedule 1, table S1.2 or otherwise required under this permit which identifies and minimises the risks of pollution relevant to that plan, and shall implement the approved revised plan in place of the original from the date of approval, unless otherwise agreed in writing by the Environment Agency.
- 2.3.2 Any raw materials or fuels listed in schedule 2 table S2.1 shall conform to the specifications set out in that table.
- 2.3.3 Waste shall only be accepted if:
 - (a) it is of a type and quantity listed in schedule 2 table S2.2; and
 - (b) it conforms to the description in the documentation supplied by the producer or holder.
- 2.3.4 The operator shall ensure that where waste produced by the activities is sent to a relevant waste operation, that operation is provided with the following information, prior to the receipt of the waste:
 - (a) the nature of the process producing the waste;
 - (b) the composition of the waste;
 - (c) the handling requirements of the waste;
 - (d) the hazardous property associated with the waste, if applicable; and
 - (e) the waste code of the waste.
- 2.3.5 The operator shall ensure that where waste produced by the activities is sent to a landfill site, it meets the waste acceptance criteria for that landfill.
- 2.3.6 Waste fuel shall not be charged, or shall cease to be charged, if:
 - (a) the combustion chamber temperature is below, or falls below, 850°C; or
 - (b) any continuous emission limit value in schedule 3 table S3.1(a) is exceeded; or
 - (c) any continuous emission limit value in schedule 3 table S3.1 is exceeded, other than under abnormal operating conditions; or
 - (d) monitoring results required to demonstrate compliance with any continuous emission limit value in schedule 3 table S3.1 are unavailable other than under abnormal operating conditions.

- 2.3.7 The operator shall have at least one auxiliary burner in each line at start up or shut down or whenever the operating temperature falls below that specified in condition 2.3.6, as long as incompletely burned waste is present in the combustion chamber. Unless the temperature specified in condition 2.3.6 is maintained in the combustion chamber, such burner(s) may be fed only with fuels which result in emissions no higher than those arising from the use of gas oil, liquefied gas or natural gas.
- 2.3.8 The operator shall record the beginning and end of each period of "abnormal operation".
- 2.3.9 During a period of "abnormal operation", the operator shall restore normal operation of the failed equipment or replace the failed equipment as rapidly as possible.
- 2.3.10 Where, during "abnormal operation", on an incineration line, any of the following situations arise, waste shall cease to be charged on that line until normal operation can be restored:
- (a) continuous measurement shows that an emission exceeds any emission limit value in schedule 3 table S3.1 due to disturbances or failures of the abatement systems, or continuous emission monitor(s) are out of service, as the case may be, for a total of 4 hours uninterrupted duration;
 - (b) the cumulative duration of "abnormal operation" periods over 1 calendar year has reached 60 hours;
 - (c) continuous measurement shows that an emission exceeds any emission limit value in schedule 3 table S3.1 (a) due to disturbances or failures of the abatement systems;
- 2.3.11 The operator shall interpret the end of the period of "abnormal operation" as the earliest of the following:
- (a) when the failed equipment is repaired and brought back into normal operation;
 - (b) when the operator initiates a shut down of the waste fuel combustion activity, as described in the application or as agreed in writing with the Environment Agency;
 - (c) when a period of four hours has elapsed from the start of the "abnormal operation";
 - (d) when, in any calendar year, an aggregated period of 60 hours "abnormal operation" has been reached.
- 2.3.12 Bottom Ash, APC Residues and Syngas Filtration Residues shall not be mixed.

2.4 Improvement programme

- 2.4.1 The operator shall complete the improvements specified in schedule 1 table S1.3 by the date specified in that table unless otherwise agreed in writing by the Environment Agency.
- 2.4.2 Except in the case of an improvement which consists only of a submission to the Environment Agency, the operator shall notify the Environment Agency within 14 days of completion of each improvement.

2.5 Pre-operational conditions

- 2.5.1 The activities shall not be brought into operation until the measures specified in schedule 1 table S1.4 have been completed.

3 Emissions and monitoring

3.1 Emissions to water, air or land

- 3.1.1 There shall be no point source emissions to water, air or land except from the sources and emission points listed in schedule 3 tables S3.1, S3.2 and S3.3 except in “abnormal operation”, when there shall be no point source emissions to water, air or land except from the sources and emission points listed in schedule 3 tables S3.1(a), S3.2 and S3.3.
- 3.1.2 The limits given in schedule 3 shall not be exceeded.
- 3.1.3 Wastes produced at the site shall, as a minimum, be sampled and analysed in accordance with schedule 3 table S 3.4 Additional samples shall be taken and tested and appropriate action taken, whenever:
- (a) disposal or recovery routes change; or
 - (b) it is suspected that the nature or composition of the waste has changed such that the route currently selected may no longer be appropriate.

3.2 Emissions of substances not controlled by emission limits

- 3.2.1 Emissions of substances not controlled by emission limits (excluding odour) shall not cause pollution. The operator shall not be taken to have breached this condition if appropriate measures, including, but not limited to, those specified in any approved emissions management plan, have been taken to prevent or where that is not practicable, to minimise, those emissions.
- 3.2.2 The operator shall:
- (a) if notified by the Environment Agency that the activities are giving rise to pollution, submit to the Environment Agency for approval within the period specified, an emissions management plan which identifies and minimises the risks of pollution from emissions of substances not controlled by emission limits;
 - (b) implement the approved emissions management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.
- 3.2.3 All liquids in containers, whose emission to water or land could cause pollution, shall be provided with secondary containment, unless the operator has used other appropriate measures to prevent or where that is not practicable, to minimise, leakage and spillage from the primary container.
- 3.2.4 The Operator shall carry out monitoring of soil and groundwater in accordance with IED articles 14(1)(b), 14(1)(e) and 16(2) to the protocol agreed in writing with the Environment Agency under PO7 in table S1.4.

3.3 Odour

- 3.3.1 Emissions from the activities shall be free from odour at levels likely to cause pollution outside the site, as perceived by an authorised officer of the Environment Agency, unless the operator has used appropriate measures, including, but not limited to, those specified in any approved odour management plan, to prevent or where that is not practicable to minimise the odour.
- 3.3.2 The operator shall:
- (a) if notified by the Environment Agency that the activities are giving rise to pollution outside the site due to odour, submit to the Environment Agency for approval within the period specified, an odour management plan which identifies and minimises the risks of pollution from odour;
 - (b) implement the approved odour management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

3.4 Noise and vibration

- 3.4.1 Emissions from the activities shall be free from noise and vibration at levels likely to cause pollution outside the site, as perceived by an authorised officer of the Environment Agency, unless the operator has used appropriate measures, including, but not limited to, those specified in any approved noise and vibration management plan to prevent or where that is not practicable to minimise the noise and vibration.
- 3.4.2 The operator shall:
- (a) if notified by the Environment Agency that the activities are giving rise to pollution outside the site due to noise and vibration, submit to the Environment Agency for approval within the period specified, a noise and vibration management plan which identifies and minimises the risks of pollution from noise and vibration;
 - (b) implement the approved noise and vibration management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

3.5 Monitoring

- 3.5.1 The operator shall, unless otherwise agreed in writing by the Environment Agency, undertake the monitoring specified in the following tables in schedule 3 to this permit:
- (a) point source emissions specified in tables S3.1, S3.1(a), S3.2 and S3.3;
 - (b) process monitoring specified in table S3.4;
 - (c) residue quality in table S3.5
- 3.5.2 The operator shall maintain records of all monitoring required by this permit including records of the taking and analysis of samples, instrument measurements (periodic and continual), calibrations, examinations, tests and surveys and any assessment or evaluation made on the basis of such data.
- 3.5.3 Monitoring equipment, techniques, personnel and organisations employed for the emissions monitoring programme and the environmental or other monitoring specified in condition 3.5.1 shall have either MCERTS certification or MCERTS accreditation (as appropriate) unless otherwise agreed in writing by the Environment Agency. Newly installed CEMs, or CEMs replacing existing CEMs, shall have MCERTS certification and have an MCERTS certified range which is not greater than 1.5 times the daily emission limit value (ELV) specified in schedule 3 table S3.1. The CEM shall also be able to measure instantaneous values over the ranges which are to be expected during all operating conditions. If it is necessary to use more than one range setting of the CEM to achieve this requirement, the CEM shall be verified for monitoring supplementary, higher ranges.
- 3.5.4 Permanent means of access shall be provided to enable sampling/monitoring to be carried out in relation to the emission points specified in schedule 3 tables S3.1 and S3.1(a), unless otherwise agreed in writing by the Environment Agency.
- 3.5.5 Where Continuous Emission Monitors are installed to comply with the monitoring requirements in schedule 3 table S3.1; the Continuous Emission Monitors shall be used such that;
- (a) the values of the 95% confidence intervals of a single measured result at the daily emission limit value shall not exceed the following percentages:

• Carbon monoxide	10%
• Sulphur dioxide	20%
• Oxides of nitrogen (NO & NO ₂ expressed as NO ₂)	20%
• Particulate matter	30%
• Total organic carbon (TOC)	30%
• Hydrogen chloride	40%

- (b) valid half-hourly average values shall be determined within the effective operating time (excluding the start-up and shut-down periods) from the measured values after having subtracted the value of the confidence intervals in condition 3.5.5 (a);
- (c) where it is necessary to calibrate or maintain the monitor and this means that data are not available for a complete half-hour period, the half-hourly average shall in any case be considered valid if measurements are available for a minimum of 20 minutes during the half-hour period. The number of half-hourly averages so validated shall not exceed 5 per day;
- (d) daily average values shall be determined as the average of all the valid half-hourly average values within a calendar day. The daily average value shall be considered valid if no more than five half-hourly average values in any day have been determined not to be valid;
- (e) no more than ten daily average values per year shall be determined not to be valid.

3.6 Pests

- 3.6.1 The activities shall not give rise to the presence of pests which are likely to cause pollution, hazard or annoyance outside the boundary of the site. The operator shall not be taken to have breached this condition if appropriate measures, including, but not limited to, those specified in any approved pests management plan, have been taken to prevent or where that is not practicable, to minimise the presence of pests on the site.
- 3.6.2 The operator shall:
 - (a) if notified by the Environment Agency, submit to the Environment Agency for approval within the period specified, a pests management plan which identifies and minimises risks of pollution, hazards or annoyance from pests;
 - (b) implement the pests management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

4 Information

4.1 Records

4.1.1 All records required to be made by this permit shall:

- (a) be legible;
- (b) be made as soon as reasonably practicable;
- (c) if amended, be amended in such a way that the original and any subsequent amendments remain legible, or are capable of retrieval; and
- (d) be retained, unless otherwise agreed in writing by the Environment Agency, for at least 6 years from the date when the records were made, or in the case of the following records until permit surrender:
 - (i) off-site environmental effects; and
 - (ii) matters which affect the condition of the land and groundwater.

4.1.2 The operator shall keep on site all records, plans and the management system required to be maintained by this permit, unless otherwise agreed in writing by the Environment Agency.

4.2 Reporting

4.2.1 The operator shall send all reports and notifications required by the permit to the Environment Agency using the contact details supplied in writing by the Environment Agency.

4.2.2 A report or reports on the performance of the activities over the previous year shall be submitted to the Environment Agency by 31 January (or other date agreed in writing by the Environment Agency) each year. The report(s) shall include as a minimum:

- (a) a review of the results of the monitoring and assessment carried out in accordance with the permit including an interpretive review of that data;
- (b) the annual production /treatment data set out in schedule 4 table S4.2; and
- (c) the performance parameters set out in schedule 4 table S4.3 using the forms specified in table S4.4 of that schedule.
- (d) the functioning and monitoring of the incineration plant in a format agreed with the Environment Agency. The report shall, as a minimum requirement (as required by Chapter IV of the Industrial Emissions Directive) give an account of the running of the process and the emissions into air and water compared with the emission standards in the IED.

4.2.3 Within 28 days of the end of the reporting period the operator shall, unless otherwise agreed in writing by the Environment Agency, submit reports of the monitoring and assessment carried out in accordance with the conditions of this permit, as follows:

- (a) in respect of the parameters and emission points specified in schedule 4 table S4.1;
- (b) for the reporting periods specified in schedule 4 table S4.1 and using the forms specified in schedule 4 table S4.4; and
- (c) giving the information from such results and assessments as may be required by the forms specified in those tables.

4.2.4 The operator shall, unless notice under this condition has been served within the preceding four years, submit to the Environment Agency, within six months of receipt of a written notice, a report assessing whether there are other appropriate measures that could be taken to prevent, or where that is not practicable, to minimise pollution.

- 4.2.5 Within 1 month of the end of each quarter, the operator shall submit to the Environment Agency using the form made available for the purpose, the information specified on the form relating to the site and the waste accepted and removed from it during the previous quarter.

4.3 Notifications

4.3.1 The Operator shall

- (a) in the event that the operation of the activities gives rise to an incident or accident which significantly affects or may significantly affect the environment, the operator must immediately—
 - (i) inform the Environment Agency,
 - (ii) take the measures necessary to limit the environmental consequences of such an incident or accident, and
 - (iii) take the measures necessary to prevent further possible incidents or accidents;
- (b) in the event of a breach of any permit condition, the operator must immediately—
 - (i) inform the Environment Agency, and
 - (ii) take the measures necessary to ensure that compliance is restored within the shortest possible time;
- (c) in the event of a breach of permit condition which poses an immediate danger to human health or threatens to cause an immediate significant adverse effect on the environment, the operator must immediately suspend the operation of the activities or the relevant part of it until compliance with the permit conditions has been restored.

- 4.3.2 Any information provided under condition 4.3.1 (a)(i), or 4.3.1 (b)(i) where the information relates to the breach of a limit specified in the permit, shall be confirmed by sending the information listed in schedule 5 to this permit within the time period specified in that schedule.

- 4.3.3 Where the Environment Agency has requested in writing that it shall be notified when the operator is to undertake monitoring and/or spot sampling, the operator shall inform the Environment Agency when the relevant monitoring and/or spot sampling is to take place. The operator shall provide this information to the Environment Agency at least 14 days before the date the monitoring is to be undertaken.

- 4.3.4 The Environment Agency shall be notified within 14 days of the occurrence of the following matters, except where such disclosure is prohibited by Stock Exchange rules:

Where the operator is a registered company:

- (a) any change in the operator's trading name, registered name or registered office address; and
- (b) any steps taken with a view to the operator going into administration, entering into a company voluntary arrangement or being wound up.

Where the operator is a corporate body other than a registered company:

- (a) any change in the operator's name or address; and
- (b) any steps taken with a view to the dissolution of the operator.

- 4.3.5 Where the operator proposes to make a change in the nature or functioning, or an extension of the activities, which may have consequences for the environment and the change is not otherwise the subject of an application for approval under the Regulations or this permit:

- (a) the Environment Agency shall be notified at least 14 days before making the change; and
- (b) the notification shall contain a description of the proposed change in operation.

- 4.3.6 The Environment Agency shall be given at least 14 days notice before implementation of any part of the site closure plan.

4.4 Interpretation

- 4.4.1 In this permit the expressions listed in schedule 6 shall have the meaning given in that schedule.

- 4.4.2 In this permit references to reports and notifications mean written reports and notifications, except where reference is made to notification being made “immediately”, in which case it may be provided by telephone.

Schedule 1 - Operations

Table S1.1 activities		
Activity listed in Schedule 1 of the EP Regulations	Description of specified activity	Limits of specified activity
S5.1 A1 (b)	The incineration of non-hazardous waste in a waste incineration plant with a capacity exceeding 3 tonnes per hour.	From receipt of waste to emission of exhaust gas and disposal of waste arising. Waste types and quantities as specified in Table S2.2 of this permit.
Directly Associated Activities		
Electricity Generation	Generation of up to 42MWe electrical power using a steam turbine from energy recovered from the flue gases.	
Back up diesel generator	For providing emergency electrical power to the plant in the event of supply interruption.	

Table S1.2 Operating techniques		
Description	Parts	Date Received
Application EPR/YP3039EX/A001	Parts B2 and B3 of the Application Form. The Supporting Information Document including associated Annex sections and the Site Condition Report.	Duly Made 11/08/14
Additional information	Further information regarding plant operational conditions and natural gas usage.	14/01/15
Additional information	Supporting information addressing compliance with Articles 47, 50(2), 50(3) and 50(4) of IED.	19/01/15
Response to Schedule 5 notice	The specification as supplied in Appendix 1 of the Schedule 5 response Specifications: SRF BS EN 15359: 2011 and provided further information with respect to waste acceptance procedures (document titled Environment Agency: Hooton Feedstock Quality Management Procedures).	09/07/15 and 02/09/15
Additional information	Supporting information for periodic monitoring of Hydrogen Fluoride emissions.	27/11/15

Table S1.3 Improvement programme requirements		
Reference	Requirement	Date
IC1	The Operator shall submit a written report to the Environment Agency on the implementation of its Environmental Management System and the progress made in the certification of the system by an external body or if appropriate submit a schedule by which the EMS will be certified.	Within 12 months of the date on which waste is first burnt.
IC2	The Operator shall submit a written report to the Environment Agency on the commissioning of the installation. The report shall summarise the environmental performance of the plant as installed against the design parameters set out in the Application. The report shall also include a review of the performance of the facility against the conditions of this permit and details of procedures developed during commissioning for achieving and demonstrating compliance with permit conditions.	Within 4 months of the completion of commissioning.
IC3	The Operator shall carry out checks to verify the residence time, minimum temperature and oxygen content of the exhaust gases in the furnace whilst operating under the anticipated most unfavourable operating conditions. The results shall be submitted in writing to the Environment Agency.	Within 4 months of the completion of commissioning.
IC4	The Operator shall submit a written report to the Environment Agency describing the performance and optimisation of the Selective Catalytic Reduction (SCR) system and combustion settings to minimise oxides of nitrogen (NO_x) emissions within the emission limit values described in this permit with the minimisation of nitrous oxide emissions. The report shall include an assessment of the level of NO_x and N₂O emissions that can be achieved under optimum operating conditions. The report shall also provide details of the optimisation (including dosing rates) for the control of acid gases and dioxins	Within 4 months of the completion of commissioning.
IC5	The Operator shall carry out an assessment of the impact of emissions to air of the following component metals subject to emission limit values, cadmium, lead, manganese, vanadium, nickel, arsenic and chromium (VI). A report on the assessment shall be made to the Environment Agency. Emissions monitoring data obtained during the first year of operation shall be used to compare the actual emissions with those assumed in the impact assessment submitted with the Application. An assessment shall be made of the impact of each metal against the relevant EQS/EAL. In the event that the assessment shows that an EQS/EAL can be exceeded, the report shall include proposals for further investigative work.	15 months from commencement of operations
IC6	The Operator shall submit a written summary report to the Agency to confirm by the results of calibration and verification testing that the performance of Continuous Emission Monitors for parameters as specified in Table S3.1 and Table S3.1(a) complies with the requirements of BS EN 14181, specifically the requirements of QAL1, QAL2 and QAL3.	Initial calibration report to be submitted to the Agency within 3 months of completion of commissioning. Full summary evidence compliance report to be submitted within 18 months of commissioning.

Table S1.4 Pre-operational measures	
Reference	Pre-operational measures
PO1	Prior to the commencement of commissioning, the Operator shall send a report to the Environment Agency which will contain a comprehensive review of the options available for utilising the heat generated by the waste incineration process in order to ensure that it is recovered as far as practicable. The review shall detail any identified proposals for improving the recovery and utilisation of waste heat and shall provide a timetable for their implementation.
PO2	Prior to the commencement of commissioning, the Operator shall submit to the Environment Agency for approval a protocol for the sampling and testing of incinerator bottom ash for the purposes of assessing its hazard status. Sampling and testing shall be carried out in accordance with the protocol as approved.
PO3	At least 2 months prior to the commencement of commissioning; the Operator shall provide a written commissioning plan, including timelines for completion, for approval by the Environment Agency. The commissioning plan shall include the expected emissions to the environment during the different stages of commissioning, the expected durations of commissioning activities and the actions to be taken to protect the environment and report to the Environment Agency in the event that actual emissions exceed expected emissions. Commissioning shall be carried out in accordance with the commissioning plan as approved.
PO4	At least 2 months prior to the commencement of commissioning, the Operator shall submit a written report to the Agency detailing the waste acceptance procedure to be used at the site. The waste acceptance procedure shall include the process and systems by which wastes unsuitable for incineration at the site will be controlled. The procedure shall be implemented in accordance with the written approval from the Environment Agency.
PO5	After completion of furnace design and at least three calendar months before any furnace operation; the operator shall submit a written report to the Agency of the details of the computational fluid dynamic (CFD) modelling. The report shall demonstrate whether the design combustion conditions comply with the residence time and temperature requirements as defined by the IED.
PO6	Prior to the commencement of commissioning, the operator shall submit a written report to the Agency for approval that includes 'as built' detailed site drainage plans (internal process water) and the specific design detail of the external surface water drainage systems and containment infrastructure at the site, including all sub-surface structures and equipment. The report shall also include an inspection and maintenance programmes for the containment infrastructure and equipment at the site.
PO7	Prior to the commencement of commissioning the Operator shall submit the written protocol referenced in condition 3.2.4 for the monitoring of soil and groundwater for approval by the Environment Agency. The protocol shall demonstrate how the Operator will meet the requirements of Articles 14(1)(b), 14(1)(e) and 16(2) of the IED.
PO8	The Operator shall prepare and submit to the Environment Agency for approval an Odour Management Plan with regard to the requirements set out in the Agency's Horizontal Guidance Note H4 (Odour management). In particular the Odour Management Plan shall review the final design for odour control measures/ equipment/ procedures associated with the operation of the Installation; and propose additional measures/ equipment/ procedures as necessary to control remaining odours with a timescale for implementation.

Table S1.4 Pre-operational measures	
Reference	Pre-operational measures
PO9	The Operator shall develop and implement formal documented procedures for the preventative inspection and subsequent maintenance of all process items that pose a potential nuisance risk through odour. These procedures shall also include documented procedures for the preventative inspection and maintenance of all items of infrastructure that have been installed to mitigate the potential odour impacts posed by the installation. The Operator shall provide the Agency with a written copy of these procedures at least 2 months prior to commissioning.
PO10	At least 2 months prior to the commencement of commissioning, the Operator shall submit to the Environment Agency for approval the final design for the fuel storage area and procedures for the removal of unacceptable waste.
PO11	Prior to the commencement of commissioning, the operator shall submit a written report to the Agency for approval an assessment of environmental hazards in the event of failure of pollution prevention measures including but not limited to ventilation failures, door failures, equipment leakage and failure of abatement measures.

Schedule 2 - Waste types, raw materials and fuels

Table S2.1 Raw materials and fuels

Raw materials and fuel description	Specification
Gas Oil for back up generators	< 0.1% sulphur content

Table S2.2 Permitted waste types and quantities for gasification plant

Maximum quantity	266,000 tonnes per annum. Maximum waste storage within installation boundary 2,000 tonnes.
Waste code	Description
19 12 07	Wood other than that mentioned in 19 12 06 (wood not containing dangerous substances)
19 12 10	Combustible waste (Solid Recovered Fuel to CEN 15359: 2011 standard)

Schedule 3 – Emissions and monitoring

Table S3.1 Point source emissions to air – emission limits and monitoring requirements						
Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard(s) or method(s)
A1- as shown on the Site Plan in Schedule 7	Particulate matter	Gasification Plant Stack	30 mg/m ³	½-hr average	Continuous measurement	BS EN 14181
A1- as shown on the Site Plan in Schedule 7	Particulate matter	Gasification Plant Stack	10 mg/m ³	Daily average	Continuous measurement	BS EN 14181
A1- as shown on the Site Plan in Schedule 7	Total Organic Carbon (TOC)	Gasification Plant Stack	20 mg/m ³	½-hr average	Continuous measurement	BS EN 14181
A1- as shown on the Site Plan in Schedule 7	Total Organic Carbon (TOC)	Gasification Plant Stack	10 mg/m ³	Daily average	Continuous measurement	BS EN 14181
A1- as shown on the Site Plan in Schedule 7	Hydrogen chloride	Gasification Plant Stack	60 mg/m ³	½-hr average	Continuous measurement	BS EN 14181
A1- as shown on the Site Plan in Schedule 7	Hydrogen chloride	Gasification Plant Stack	10 mg/m ³	Daily average	Continuous measurement	BS EN 14181
A1- as shown on the Site Plan in Schedule 7	Hydrogen fluoride	Gasification Plant Stack	2 mg/m ³	Periodic over minimum 1-hour period	Quarterly in first year. Then Bi-annual	BS ISO 15713

Table S3.1 Point source emissions to air – emission limits and monitoring requirements

Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard(s) or method(s)
A1- as shown on the Site Plan in Schedule 7	Carbon monoxide	Gasification Plant Stack	100 mg/m ³	½-hr average	Continuous measurement	BS EN 14181
A1- as shown on the Site Plan in Schedule 7	Carbon monoxide	Gasification Plant Stack	50 mg/m ³	Daily average	Continuous measurement	BS EN 14181
A1- as shown on the Site Plan in Schedule 7	Sulphur dioxide	Gasification Plant Stack	200 mg/m ³	½-hr average	Continuous measurement	BS EN 14181
A1- as shown on the Site Plan in Schedule 7	Sulphur dioxide	Gasification Plant Stack	50 mg/m ³	Daily average	Continuous measurement	BS EN 14181
A1- as shown on the Site Plan in Schedule 7	Oxides of nitrogen (NO and NO ₂ expressed as NO ₂)	Gasification Plant Stack	220 mg/m ³	½-hr average	Continuous measurement	BS EN 14181
A1- as shown on the Site Plan in Schedule 7	Oxides of nitrogen (NO and NO ₂ expressed as NO ₂)	Gasification Plant Stack	100 mg/m ³	Daily average	Continuous measurement	BS EN 14181
A1- as shown on the Site Plan in Schedule 7	Cadmium & thallium and their compounds (total)	Gasification Plant Stack	0.05 mg/m ³	Periodic over minimum 30 minute, maximum 8 hour period	Quarterly in first year. Then Bi-annual	BS EN 14385
A1 as shown on the Site Plan in Schedule 7	Mercury and its compounds	Gasification Plant Stack	0.05 mg/m ³	Periodic over minimum 30 minute, maximum 8 hour period	Quarterly in first year. Then Bi-annual	BS EN 13211

Table S3.1 Point source emissions to air – emission limits and monitoring requirements						
Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard(s) or method(s)
A1 as shown on the Site Plan in Schedule 7	Sb, As, Pb, Cr, Co, Cu, Mn, Ni and V and their compounds (total)	Gasification Plant Stack	0.5 mg/m ³	Periodic over minimum 30 minute, maximum 8 hour period	Quarterly in first year. Then Bi-annual	BS EN 14385
A1 as shown on the Site Plan in Schedule 7	Ammonia (NH ₃)	Gasification Plant Stack	10 mg/m ³	Continuous	Continuous measurement	BS EN 14181
A1 as shown on the Site Plan in Schedule 7	Nitrous oxide (N ₂ O)	Gasification Plant Stack	No Limit Set	Periodic over minimum 1-hour period	Quarterly in the first year of operation, then bi-annual	BS EN ISO 21258
A1 as shown on the Site Plan in Schedule 7	Dioxins / furans (I-TEQ)	Gasification Plant Stack	0.1 ng/m ³	Periodic over minimum 6 hours, maximum 8 hour period	Quarterly in first year. Then Bi-annual	BS EN 1948 Parts 1, 2 and 3
A1 as shown on the Site Plan in Schedule 7	Dioxins / furans (WHO-TEQ Humans / Mammals)	Gasification Plant Stack	No Limit Set	Periodic over minimum 6 hours, maximum 8 hour period	Quarterly in first year. Then Bi-annual	BS EN 1948 Parts 1, 2 and 3
A1 as shown on the Site Plan in Schedule 7	Dioxins / furans (WHO-TEQ Fish)	Gasification Plant Stack	No Limit Set	Periodic over minimum 6 hours, maximum 8 hour period	Quarterly in first year. Then Bi-annual	BS EN 1948 Parts 1, 2 and 3
A1 as shown on the Site Plan in Schedule 7	Dioxins / furans (WHO-TEQ Birds)	Gasification Plant Stack	No Limit Set	Periodic over minimum 6 hours, maximum 8 hour period	Quarterly in first year. Then Bi-annual	BS EN 1948 Parts 1, 2 and 3
A1 as shown on the Site Plan in Schedule 7	Dioxin-like PCBs (WHO-TEQ Humans / Mammals)	Gasification Plant Stack	No Limit Set	Periodic over minimum 6 hours, maximum 8 hour period	Quarterly in first year. Then Bi-annual	BS EN 1948-4

Table S3.1 Point source emissions to air – emission limits and monitoring requirements

Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard(s) or method(s)
A1 as shown on the Site Plan in Schedule 7	Dioxin-like PCBs (WHO-TEQ Fish)	Gasification Plant Stack	No Limit Set	Periodic over minimum 6 hours, maximum 8 hour period	Quarterly in first year. Then Bi-annual	BS EN 1948-4
A1 as shown on the Site Plan in Schedule 7	Dioxin-like PCBs (WHO-TEQ Birds)	Gasification Plant Stack	No Limit Set	Periodic over minimum 6 hours, maximum 8 hour period	Quarterly in first year. Then Bi-annual	BS EN 1948-4
A1 as shown on the Site Plan in Schedule 7	Specific individual poly-cyclic aromatic hydrocarbons (PAHs), as specified in Schedule 6.	Gasification Plant Stack	No Limit Set	Periodic over minimum 6 hours, maximum 8 hour period	Quarterly in first year. Then Bi-annual	BS ISO 11338 Parts 1 and 2.
A2 as shown on the Site Plan in Schedule 7	No parameter set	Emergency release valve	No Limit Set	-	-	-
A3- as shown on the Site Plan in Schedule 7	No parameter set	Day fuel silo	No Limit Set	-	-	-
A4-as shown on the Site Plan in Schedule 7	No parameter set	Day fuel silo	No Limit Set	-	-	-
A5 as shown on the Site Plan in Schedule 7	No parameter set	Day fuel silo	No Limit Set	-	-	-
A6 as shown on the Site Plan in Schedule 7	No parameter set	Fuel silo	No Limit Set	-	-	-
A7-as shown on the Site Plan in Schedule 7	No parameter set	Fuel silo	No Limit Set	-	-	-

Table S3.1 Point source emissions to air – emission limits and monitoring requirements

Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard(s) or method(s)
A8 as shown on the Site Plan in Schedule 7	No parameter set	Fuel silo	No Limit Set	-	-	-

Table S3.1(a) Point source emissions to air during abnormal operation of incineration plant – emission limits and monitoring requirements

Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard or method
A1 as shown on the Site Plan in Schedule 7	Particulate matter	Gasification Plant Stack	150 mg/m ³	½-hr average	Continuous measurement	BS EN 15267-3 during abatement plant failure
A1 as shown on the Site Plan in Schedule 7	Total Organic Carbon (TOC)	Gasification Plant Stack	20 mg/m ³	½-hr average	Continuous measurement	BS EN 15267-3 during abatement plant failure
A1 as shown on the Site Plan in Schedule 7	Carbon monoxide	Gasification Plant Stack	100 mg/m ³	½-hr average	Continuous measurement	BS EN 15267-3 during abatement plant failure

Table S3.2 Point Source emissions to water (other than sewer) and land – emission limits and monitoring requirements

Emission point ref. & location	Parameter	Source	Limit (incl. unit)	Reference Period	Monitoring frequency	Monitoring standard or method
W1 as shown on the Site Plan in Schedule 7	No parameters set	Uncontaminated surface water via balancing pond and oil interceptors	No Limit Set	-	-	-

Table S3.3 Point source emissions to sewer, effluent treatment plant or other transfers off-site– emission limits and monitoring requirements

Emission point ref. & location	Parameter	Source	Limit (incl. unit)	Reference Period	Monitoring frequency	Monitoring standard or method
S1 as shown on the Site Plan in Schedule 7	-	Boiler blow down process liquors sent to United Utilities Water PLC under a trade effluent sewer	No Limit Set	-	-	-

Table S3.4 Process monitoring requirements

Location or description of point of measurement	Parameter	Monitoring frequency	Monitoring standard or method	Other specifications
Location close to the Combustion Chamber inner wall or as identified and justified in Application.	Temperature (° C)	Continuous	Traceable to national standards	As agreed in writing with the Agency including positioning of temperature probes following results of the CFD model submitted in accordance with PO5.
A1 as shown on the Site Plan in Schedule 7	Exhaust gas temperature	Continuous	Traceable to national standards	As agreed in writing with the Agency.
A1 as shown on the Site Plan in Schedule 7	Exhaust gas pressure	Continuous	Traceable to national standards	As agreed in writing with the Agency.
A1 as shown on the Site Plan in Schedule 7	Exhaust gas oxygen content	Continuous	BS EN 15267-3 BS EN 14181	
A1 as shown on the Site Plan in Schedule 7	Exhaust gas water vapour content	Continuous	BS EN 15267-3 BS EN 14181	Unless gas is dried before analysis of emissions.

Table S3.5 Residue quality

Emission point reference or source or description of point of measurement	Parameter	Limit	Monitoring frequency	Monitoring standard or method *	Other specifications
Bottom Ash	TOC	<3%	Monthly in the first year of operation. Then Quarterly	Environment Agency ash sampling protocol.	
Bottom Ash	Metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) and their compounds, dioxins/furans and dioxin-like PCBs.	No Limit Set	Monthly in the first year of operation. Then Quarterly	Sampling and analysis as per Environment Agency ash sampling protocol.	
Bottom Ash	Total soluble fraction and metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) soluble fractions	No Limit Set	Before use of a new disposal or recycling route	Sampling and analysis as per Environment Agency ash sampling protocol.	
APC Residues	Metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) and their compounds, dioxins/furans and dioxin-like PCBs.	No Limit Set	Monthly in the first year of operation. Then Quarterly	Sampling and analysis as per Environment Agency ash sampling protocol.	
APC Residues	Total soluble fraction and metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) soluble fractions	No Limit Set	Before use of a new disposal or recycling route	Sampling and analysis as per Environment Agency ash sampling protocol.	

Table S3.5 Residue quality					
Emission point reference or source or description of point of measurement	Parameter	Limit	Monitoring frequency	Monitoring standard or method *	Other specifications
Syngas Filtration Residue	Metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) and their compounds, dioxins/furans and dioxin-like PCBs.	No Limit Set	Monthly in the first year of operation. Then Quarterly	Sampling and analysis as per Environment Agency ash sampling protocol.	
Syngas Filtration Residue	Total soluble fraction and metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) soluble fractions	No Limit Set	Before use of a new disposal or recycling route	Sampling and analysis as per Environment Agency ash sampling protocol.	

* Or other equivalent standard as agreed in writing with the Environment Agency.

Schedule 4 - Reporting

Parameters, for which reports shall be made, in accordance with conditions of this permit, are listed below.

Table S4.1 Reporting of monitoring data			
Parameter	Emission or monitoring point/reference	Reporting period	Period begins
Emissions to air Parameters as required by condition 3.5.1	A1	Quarterly	1 Jan, 1 Apr, 1 Jul and 1 Oct
TOC Parameters as required by condition 3.5.1	Bottom Ash	Quarterly (but monthly for the first year of operation)	1 Jan, 1 Apr, 1 Jul and 1 Oct
Metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) and their compounds, dioxins/furans and dioxin-like PCBs Parameters as required by condition 3.5.1	Bottom Ash, APC Residues and Syngas Filtration residue.	Quarterly (but monthly for the first year of operation)	1 Jan, 1 Apr, 1 Jul and 1 Oct
Total soluble fraction and metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) soluble fractions Parameters as required by condition 3.5.1	Bottom Ash, APC Residues and Syngas Filtration residue.	Before use of a new disposal or recycling route	
Functioning and monitoring of the incineration plant as required by condition 4.2.2		Annually	1 Jan

Table S4.2 Annual production/treatment	
Parameter	Units
Total Waste Incinerated	tonnes
Electrical energy produced	KWhrs
Thermal energy produced as steam	KWhrs
Electrical energy exported	KWhrs
Electrical energy used on installation	KWhrs
Waste heat utilised by the installation	KWhrs

Table S4.3 Performance parameters		
Parameter	Frequency of assessment	Units
Electrical energy exported, imported and used at the installation	Quarterly	KWhrs / tonne of waste incinerated
Fuel gas consumption	Quarterly	Kgs / tonne of waste incinerated
Mass of Bottom Ash produced	Quarterly	Kgs / tonne of waste incinerated
Mass of APC residues produced	Quarterly	Kgs / tonne of waste incinerated

Table S4.3 Performance parameters

Parameter	Frequency of assessment	Units
Mass of Syngas Filtration residues produced	Quarterly	Kgs / tonne of waste incinerated
Ammonia consumption	Quarterly	Kgs / tonne of waste incinerated
Activated Carbon consumption	Quarterly	Kgs / tonne of waste incinerated
Lime consumption	Quarterly	Kgs / tonne of waste incinerated
Limestone consumption	Quarterly	Kgs / tonne of waste incinerated
Water consumption	Quarterly	Kgs / tonne of waste incinerated
Periods of abnormal operation	Quarterly	No of occasions and cumulative hours for current calendar year for each line.

Table S4.4 Reporting forms

Media/parameter	Reporting format	Date of form
Air	Form air 1-7 or other form as agreed in writing by the Environment Agency	14/12/15
Water Usage and other Raw Materials	Form WU/RM1 or other form as agreed in writing by the Environment Agency	14/12/15
Residues	Form residues1 or other form as agreed in writing by the Environment Agency	14/12/15
Energy usage	Form energy 1 or other form as agreed in writing by the Environment Agency	14/12/15
Other performance indicators	Form performance 1 or other form as agreed in writing by the Environment Agency	14/12/15

Schedule 5 - Notification

These pages outline the information that the operator must provide.

Units of measurement used in information supplied under Part A and B requirements shall be appropriate to the circumstances of the emission. Where appropriate, a comparison should be made of actual emissions and authorised emission limits.

If any information is considered commercially confidential, it should be separated from non-confidential information, supplied on a separate sheet and accompanied by an application for commercial confidentiality under the provisions of the EP Regulations.

Part A

Permit Number	
Name of operator	
Location of Facility	
Time and date of the detection	

(a) Notification requirements for any malfunction, breakdown or failure of equipment or techniques, accident, or emission of a substance not controlled by an emission limit which has caused, is causing or may cause significant pollution

To be notified within 24 hours of detection	
Date and time of the event	
Reference or description of the location of the event	
Description of where any release into the environment took place	
Substances(s) potentially released	
Best estimate of the quantity or rate of release of substances	
Measures taken, or intended to be taken, to stop any emission	
Description of the failure or accident.	

(b) Notification requirements for the breach of a limit

To be notified within 24 hours of detection unless otherwise specified below	
Emission point reference/ source	
Parameter(s)	
Limit	
Measured value and uncertainty	
Date and time of monitoring	
Measures taken, or intended to be taken, to stop the emission	

Time periods for notification following detection of a breach of a limit	
Parameter	Notification period

(c) Notification requirements for the detection of any significant adverse environmental effect	
To be notified within 24 hours of detection	
Description of where the effect on the environment was detected	
Substances(s) detected	
Concentrations of substances detected	
Date of monitoring/sampling	

Part B - to be submitted as soon as practicable

Any more accurate information on the matters for notification under Part A.	
Measures taken, or intended to be taken, to prevent a recurrence of the incident	
Measures taken, or intended to be taken, to rectify, limit or prevent any pollution of the environment which has been or may be caused by the emission	
The dates of any unauthorised emissions from the facility in the preceding 24 months.	

Name*	
Post	
Signature	
Date	

* authorised to sign on behalf of the operator

Schedule 6 - Interpretation

“abatement equipment” means that equipment dedicated to the removal of polluting substances from releases from the installation to air or water media.

“abnormal operation” means any technically unavoidable stoppages, disturbances, or failures of the abatement plant or the measurement devices [other than continuous emission monitors for releases to air of particulates, TOC and/or CO], during which the emissions into the air and the discharges of waste water may exceed the prescribed emission limit values

“accident” means an accident that may result in pollution.

“APC residues” means air pollution control residues

“application” means the application for this permit, together with any additional information supplied by the operator as part of the application and any response to a notice served under Schedule 5 to the EP Regulations.

“authorised officer” means any person authorised by the Environment Agency under section 108(1) of The Environment Act 1995 to exercise, in accordance with the terms of any such authorisation, any power specified in section 108(4) of that Act.

“bi-annual” means twice per year with at least five months between tests;

“bottom ash” means gasifier solid residue

“CEM” Continuous emission monitor

“CEN” means Comité Européen de Normalisation

“daily average” for releases of substances to air means the average of valid half-hourly averages over [a calendar day] during normal operation.

“dioxin and furans” means polychlorinated dibenzo-p-dioxins and polychlorinated dibenzofurans.

“disposal” means any of the operations provided for in Annex I to Directive 2008/98/EC of the European Parliament and of the Council on waste.

“emissions to land” includes emissions to groundwater.

“EP Regulations” means The Environmental Permitting (England and Wales) Regulations SI 2010 No.675 and words and expressions used in this permit which are also used in the Regulations have the same meanings as in those Regulations.

“emissions of substances not controlled by emission limits” means emissions of substances to air, water or land from the activities, either from the emission points specified in schedule 3 or from other localised or diffuse sources, which are not controlled by an emission or background concentration limit..

“groundwater” means all water, which is below the surface of the ground in the saturation zone and in direct contact with the ground or subsoil.

“hazardous property” has the meaning given in Schedule 3 of the Hazardous Waste (England and Wales) Regulations 2005 No.894 and the Hazardous Waste (Wales) Regulations 2005 No. 1806 (W.138).

“incineration line” means all of the incineration equipment related to a common discharge to air location.

“Industrial Emissions Directive” means DIRECTIVE 2010/75/EU OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 24 November 2010 on industrial emissions

“ISO” means International Standards Organisation.

“LOI” means loss on ignition a technique used to determine the combustible material by heating the ash residue to a high temperature

“MCERTS” means the Environment Agency's Monitoring Certification Scheme.

"PAH" means Poly-cyclic aromatic hydrocarbon, and comprises Anthanthrene, Benzo[a]anthracene, Benzo[b]fluoranthene, Benzo[k]fluoranthene, Benzo[b]naph(2,1-d)thiophene, Benzo[c]phenanthrene, Benzo[ghi]perylene, Benzo[a]pyrene, Cholanthrene, Chrysene, Cyclopenta[c,d]pyrene, Dibenzo[ah]anthracene, Dibenzo[a,i]pyrene Fluoranthene, Indo[1,2,3-cd]pyrene, Naphthalene

"PCB" means *Polychlorinated Biphenyl*. Dioxin-like PCBs are the non-ortho and mono-ortho PCBs listed in the table below.

"quarterly" for reporting/sampling means after/during each 3 month period, January to March; April to June; July to September and October to December and, when sampling, with at least 2 months between each sampling date.

"quarter" means a calendar year quarter commencing on 1 January, 1 April, 1 July or 1 October.

"recovery" means any of the operations provided for in Annex II to Directive 2008/98/EC of the European Parliament and of the Council on waste.

"shut down" is any period where the plant is being returned to a non-operational state and there is no waste being burned.

"start up" is any period, where the plant has been non-operational, after igniting the auxiliary burner until waste fuel has been fed to the plant in sufficient quantity to initiate steady-state conditions.

"Syngas filtration residue" means residue collected after ceramic filtration of Syngas.

"TOC" means *Total Organic Carbon*. In respect of releases to air, this means the gaseous and vaporous organic substances, expressed as TOC. [In respect of Bottom Ash, this means the total carbon content of all organic species present in the ash (excluding carbon in elemental form).]

"Waste code" means the six digit code referable to a type of waste in accordance with the List of Wastes (England) Regulations 2005, or List of Wastes (Wales) Regulations 2005, as appropriate, and in relation to hazardous waste, includes the asterisk.

"Waste Framework Directive" or "WFD" means Waste Framework Directive 2008/98/EC of the European Parliament and of the Council on waste

"year" means calendar year ending 31 December.

Where a minimum limit is set for any emission parameter, for example pH, reference to exceeding the limit shall mean that the parameter shall not be less than that limit.

Unless otherwise stated, any references in this permit to concentrations of substances in emissions into air means:


- (a) in relation to emissions from combustion processes, the concentration in dry air at a temperature of 273K, at a pressure of 101.3 kPa and with an oxygen content of 3% dry for liquid and gaseous fuels, 6% dry for solid fuels; and/or
- (b) in relation to emissions from non-combustion sources, the concentration at a temperature of 273K and at a pressure of 101.3 kPa, with no correction for water vapour content; and/or
- (c) in relation to gases from incineration and co-incineration plants other than those burning waste oil, the concentration in dry air at a temperature of 273K, at a pressure of 101.3 kPa and with an oxygen content of 11% dry.

For dioxins/furans and dioxin-like PCBs the determination of the toxic equivalence concentration (I-TEQ, & WHO-TEQ for dioxins/furans, WHO-TEQ for dioxin-like PCBs) stated as a release limit and/ or reporting requirement, the mass concentrations of the following congeners have to be multiplied with their respective toxic equivalence factors before summing. When reporting on measurements of dioxins/furans and dioxin-like PCBs, the toxic equivalence concentrations should be reported as a range based on: all congeners less than the detection limit assumed to be zero as a minimum, and all congeners less than the detection limit assumed to be at the detection limit as a maximum. However the minimum value should be used when assessing compliance with the emission limit value in table S3.1.

TEF schemes for dioxins and furans				
Congener	I-TEF	WHO-TEF		
	1990	2005	1997/8	
		Humans / Mammals	Fish	Birds
Dioxins				
2,3,7,8-TCDD	1	1	1	1
1,2,3,7,8-PeCDD	0.5	1	1	1
1,2,3,4,7,8-HxCDD	0.1	0.1	0.5	0.05
1,2,3,6,7,8-HxCDD	0.1	0.1	0.01	0.01
1,2,3,7,8,9-HxCDD	0.1	0.1	0.01	0.1
1,2,3,4,6,7,8-HpCDD	0.01	0.01	0.001	<0.001
OCDD	0.001	0.0003	-	-
Furans				
2,3,7,8-TCDF	0.1	0.1	0.05	1
1,2,3,7,8-PeCDF	0.05	0.03	0.05	0.1
2,3,4,7,8-PeCDF	0.5	0.3	0.5	1
1,2,3,4,7,8-HxCDF	0.1	0.1	0.1	0.1
1,2,3,7,8,9-HxCDF	0.1	0.1	0.1	0.1
1,2,3,6,7,8-HxCDF	0.1	0.1	0.1	0.1
2,3,4,6,7,8-HxCDF	0.1	0.1	0.1	0.1
1,2,3,4,6,7,8 HpCDF	0.01	0.01	0.01	0.01
1,2,3,4,7,8,9-HpCDF	0.01	0.01	0.01	0.01
OCDF	0.001	0.0003	0.0001	0.0001

TEF schemes for dioxin-like PCBs			
Congener	WHO-TEF		
	2005	1997/8	
	Humans / mammals	Fish	Birds
Non-ortho PCBs			
3,4,4',5-TCB (81)	0.0001	0.0005	0.1
3,3',4,4'-TCB (77)	0.0003	0.0001	0.05
3,3',4,4',5 - PeCB (126)	0.1	0.005	0.1
3,3',4,4',5,5'-HxCB(169)	0.03	0.00005	0.001
Mono-ortho PCBs			
2,3,3',4,4'-PeCB (105)	0.00003	<0.000005	0.0001
2,3,4,4',5-PeCB (114)	0.00003	<0.000005	0.0001
2,3',4,4',5-PeCB (118)	0.00003	<0.000005	0.00001
2',3,4,4',5-PeCB (123)	0.00003	<0.000005	0.00001
2,3,3',4,4',5-HxCB (156)	0.00003	<0.000005	0.0001
2,3,3',4,4',5'-HxCB (157)	0.00003	<0.000005	0.0001
2,3',4,4',5,5'-HxCB (167)	0.00003	<0.000005	0.00001
2,3,3',4,4',5,5'-HpCB (189)	0.00003	<0.000005	0.00001

Schedule 7 - Site plan

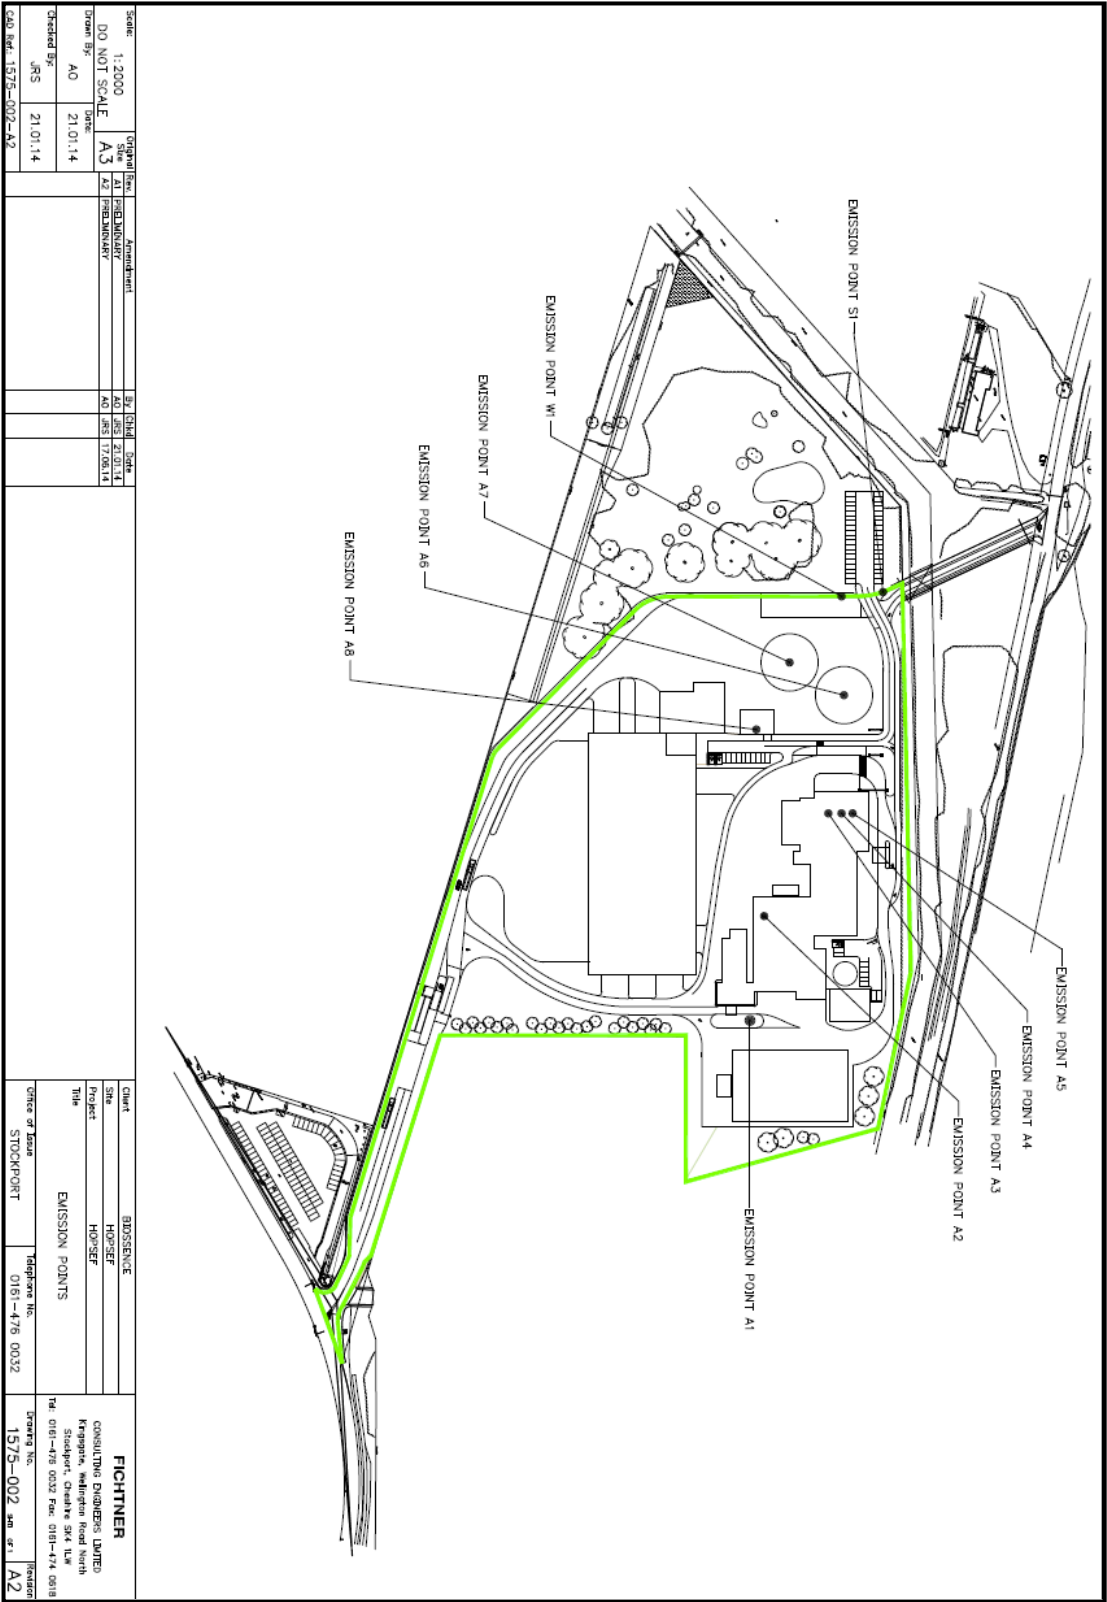

END OF PERMIT